

19



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

11 Publication number:

**0 337 451**  
**A2**

12

## EUROPEAN PATENT APPLICATION

21 Application number: 89106586.4

51 Int. Cl.4: D04H 1/44

22 Date of filing: 13.04.89

30 Priority: 14.04.88 US 181284

43 Date of publication of application:  
18.10.89 Bulletin 89/42

64 Designated Contracting States:  
BE DE FR GB NL

71 Applicant: VERATEC, INC.  
100 Elm Street  
Walpole, MA 02081-1898(US)

72 Inventor: Greenway, John Michael  
44 Spruce Drive  
Westwood, MA 02090(US)  
Inventor: Schortmann, Walter Edward  
2630 Diamond Hill Road  
Cumberland, RI 02864(US)  
Inventor: Mancini, Peter  
161 Common Street  
Walpole, MA 02081(US)  
Inventor: Metrick, Dennis  
26 Forestdale Drive  
Cumberland RI 02864(US)  
Inventor: Connolly, Timothy  
20 East Monroe Street  
Norwood, MA 02062(US)

74 Representative: Reichel, Wolfgang, Dipl.-Ing.  
et al  
Reichel und Reichel Parkstrasse 13  
D-6000 Frankfurt am Main 1(DE)

54 Apparatus for producing symmetrical fluid entangled non-woven fabrics and related method.

57 An apparatus and related process for entangling a staple fibrous web which employs divergent fluid jets. The web is advanced through an entangling station on a conveying means which supports an entangling member having a symmetrical pattern of fluid pervious void areas. The divergent jet sprays which are disposed above the entangling member direct a continuous curtain of fluid onto the web, coating with the entangling member to entangle web fibers into a coherent lattice structure. The divergent jet sprays are provided by nozzles having wide orifice diameters which accommodate less complex fluid recirculation and filtration systems than employed in the prior art columnar jet processes.

EP 0 337 451 A2

# APPARATUS FOR PRODUCING SYMMETRICAL FLUID ENTANGLED NON-WOVEN FABRICS AND RELATED METHOD

## Field of Invention

This invention generally relates to an apparatus for use in-line with carding apparatus for entangling a non-woven web. More particularly, it is concerned with a divergent jet fluid entangling apparatus and related process which precisely orient fibers in a non-woven web into prescribed patterns without requirement of complex filtration, scrambler and air lay systems of the prior art. Non-woven fabrics produced by the method of the invention have a patterned symmetrical structure with machine and cross-direction ("MD/CD") randomization ratios in the range of 1:1 - 4:1 and corresponding MD/CD tensile strengths.

## Background Art

In prior art fluid entangling processes, webs of non-woven fibers are treated with high pressure fluids while supported on apertured patterning screens. Typically, the patterning screen is provided on a drum or continuous conveyor which traverses pressurized fluid jets. Entanglement is effected by employing columnar jet streams which entangle fibers in the web into ordered groups and configurations corresponding to the aperture array in the patterning screen. Non-woven fabrics having MD and CD tensile strengths and randomized structures are produced by action of the jet streams which cause fibers in the web to migrate to apertured or void areas in the screen, entangle and intertwine.

Commercial apparatus which practice this technology generally employ pumping and filtration systems which recirculate fluid from jet streams for reuse. Particular difficulty in high pressure hydroentangling processes is presented by the use of columnar jet streams which are provided by small diameter orifice nozzels. Complex filtration systems are required to remove fiber debris which is dislodged from the web by the high pressure jet streams to prevent clogging of the debris in jet nozzles.

To achieve effective hydroentangling of fibers known processes also employ a variety of carding operations and fiber randomization processes. For example, carded web may be randomized by scrambling and air lay systems prior to entangling.

In conventional entangling processes, air is entrained by high pressure columnar jets which lift the web from the patterning screens resulting in irregularities in the structure of the formed fabric. To counteract this effect, prior art processes employ vacuum systems including, arrangements of slots which are positioned beneath the patterning screen in alignment with the jets to hold the web to the screen. For this same purpose, the art also employs top screens which are placed over the web to restrain its movement.

Vacuum and screen baffling systems of the prior art introduce machine complexity and associated tooling costs. Top screens lower energy efficiency of the entangling process by reducing the energy flux of fluids which impinge upon the web, restricting movement of the fibers. See U.S. Patent No. 2,862,251 to F. Kalwaites.

Prior art hydroentangling processes for producing patterned non-woven fabrics which employ high pressure columnar jet streams are represented by U.S. Patent Nos. 3,485,706 and 3,498,874, respectively, to Evans and Evans et al, and U.S. Patent No. 4,379,799 to Holmes et al.

The present invention is directed to a fluid entangling process and related apparatus for producing novel non-woven fabrics without requirement of the complex machinery of the prior art. Departing from conventional processes, the present invention employs pressurized fan jets with wide diameter outlet orifices to direct divergent fluid sprays to non-randomized fibrous webs. The divergent jets coact with specially configured forming members which support the web. Wide diameter divergent jet nozzles employed in the invention facilitate recirculation of jet streams without requirement of complex filtration systems.

It will be recognized that a process which employs divergent jet streams yields advantages in machinery design and energy efficiencies. The invention departs from the prior art practices which found divergent jets unacceptable for use in entangling processes. The art teaches that divergent sprays entrain excessive air volumes, generating turbulence at web surfaces, yielding non-woven fabrics having non-uniform fiber characteristics. See U.S. Patent No. 3,498,874 to Evans et al., col. 6, lines 49 - 75.

Accordingly, it is a broad object of the invention to provide an improved fluid entangling apparatus and related method for production of a variety of novel non-woven fabrics having tensile strength and structural characteristics which advance the art.

A more specific object of the invention is to provide hydroentangling apparatus which is mechanically less complex than employed in prior art processes.

A further object of the invention is to provide a hydroentangling apparatus and process which produce non-woven fabrics having symmetrical structures and MD/CD randomization ratios in the range of 1:1 - 4:1.

5 A still further object of the invention is to produce non-wovens having improved tensile strength characteristics employing apparatus and processes which are less complex as compared to the prior art.

#### Disclosure of the Invention

10

In the present invention, these purposes, as well as others which will be apparent, are achieved generally by providing an apparatus and related process for entangling a staple, non-randomized fibrous web which employs divergent fluid jets to randomize and entangle web fibers. The web is advanced through an entangling station on a conveying means which supports an entangling member or forming screen  
15 having a symmetrical pattern of fluid pervious void areas. Divergent jet sprays which are disposed above the entangling member direct a continuous curtain of fluid onto the web, coating with the entangling member to precisely orient the fiber structure and entangle the web fibers into a coherent lattice structure.

To disperse air entrained at the web surface, control means are provided which includes a baffle plate and coating means for directing an air curtain to the web at an entry area of the entangling station. The  
20 control means also includes a generally hollow perforated cylindrical roll disposed for frictional rotatable movement on the web at a terminal end area of the entangling station.

In a preferred embodiment of the invention, a plurality of divergent jet nozzles are mounted on closely packed cross-directionally aligned spaced manifolds. Divergent jets oriented in the CD are provided with angles of divergence in the range of 2 to 30 degrees, and located within 3 to 6 inches from the entangling  
25 member. Pressure is preferably ramped in the MD from manifold to manifold over a pressure range of 200 - 1100 psi to impart energy to the web of approximately 1.0 hp-hr/lb of fabric.

It is a feature of the invention to employ an entangling member which has a symmetrical pattern of void areas which correspond to preferred fabric patterns. The void areas preferably occupy at least 25 per cent of the entangling member area. Improved MD and/or CD tensile strengths are obtained by void patterns  
30 having varying MD/CD configurations. The preferred pattern includes a plurality of apertures arranged so that the spacing ratio of MD apertures is greater than CD apertures. This pattern yields a novel fabric pattern in which an array of dense nodes are connected by a diamond shaped pattern of interstitial fibers.

The apparatus and related method of the invention advance the art by use of a divergent jet system which is less complex and precision demanding than hydroentangling systems of the prior art. Divergent jet  
35 nozzles employed in the invention have wide orifice diameters as compared to prior art columnar jet systems and, accordingly, do not require the exacting filtration systems of the prior art. Fiber debris contained in fluid recirculated to the divergent jet nozzles in the entangling process pass through the wide diameter orifices without clogging as is prevalent in prior art columnar systems which have small diameter orifices.

40 Other objects, features and advantages of the present invention will be apparent when the detailed description of the preferred embodiments of the invention are considered in conjunction with the drawings which should be construed in an illustrative and not limiting sense as follows:

#### Brief Description of the Drawings

45 Fig. 1 is a schematic view of a production line including an entangling station in accordance with the invention for the continuous production of symmetrical hydroentangled non-woven fabrics;

Fig. 2 is a schematic illustration of the hydroentangling process of the invention;

50 Fig. 3 is a isometric view of the apparatus represented by the hydroentangling entangling station of Fig. 1 showing the manner in which carded web is advanced through an entangling jet fluid curtain supported on a generally planar conveyor and fabric entangling and forming member;

Fig. 4 is a cross-section of the entangling apparatus of Fig. 3 which also includes a schematic illustration of a pumping and filtration system employed in the invention;

55 Fig. 5 is a cross-section of an alternative embodiment of the hydroentangling apparatus in which an entangling member having a cylindrical configuration is substituted for the generally planar conveyor and fabric forming member of Fig. 3;

Fig. 6A is a plan view of MD aligned carded web overlying an apertured fabric forming member prior to entanglement of web fibers, the forming screen having an aperture pattern including a larger spacing ratio between MD than CD apertures;

Fig. 6B illustrates the entangled fiber pattern formed on the screen of Fig. 6A employing the hydroentangling apparatus and process of the invention;

Fig. 7 is an illustration similar to Fig. 6B in which the forming member has an aperture pattern including a larger spacing ratio between CD than MD apertures;

Fig. 8 illustrates an alternative woven entangling member weave structured non-woven fabric produced in accordance with the apparatus and process of the invention;

Fig. 9 is a cross-section of an alternative entangling apparatus embodiment, similar to Fig. 4, in which baffles are arranged in proximity to the web between spaced manifolds;

Figs. 10A and B are photographs at 10X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 1 on the apertured entangling member illustrated in Figs. 6A and 6B;

Figs. 11A and B are photographs at 10X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 3 on the apertured entangling member illustrated in Fig. 7;

Fig. 12 is a photograph at 1.8X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 4 on a planar fine mesh reverse dutch woven screen (not illustrated);

Fig. 13 is a photograph at 1.8X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 5 on a planar mesh reverse dutch screen (not illustrated);

Fig. 14 is a photograph at 1.8X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 6 on a planar woven screen overlaid with a hexagonal screen (not illustrated); and

Fig. 15 is a photograph at 10X magnification of a hydroentangled non-woven cotton fabric produced as disclosed in Example 7 and 8 on the woven forming screen illustrated in Fig. 8.

#### Best Mode of Carrying Out The Invention

With further reference to the drawings, a view of preferred embodiment of the entangling apparatus 10 is shown in Fig. 1 situated at the output end of a series of conventional carding apparatus C1 - C4. The apparatus 10 provides a system for entangling non-woven fibrous materials by a novel fluid entangling process. Particular advantage is obtained when the entangling process of the invention is applied to non-randomized fibrous web 12.

Fig. 1 illustrates a preferred application of the apparatus 10 in-line with conventional carding apparatus C1 - C4 which output machine direction ("MD") oriented carded web to a peeler roller (not shown) and inclined conveyor 14 for processing in the apparatus of the invention. In the preferred embodiment water is employed to hydroentangle and randomize the fibers in the carded web 12 in an entangling station 16 in a manner to be hereinafter described.

Following the entangling process the web is conveyed to a conventional padder 18 and dry can 20 apparatus to provide a finished non-woven fabric for stock rolling on a winder 22.

#### Mechanism of the Entangling Apparatus

Referring now specifically to the mechanism of the entangling apparatus 10, which is best illustrated in Fig. 3, this unit includes an endless conveyor means for advancing the non-randomized web through the entangling station 16. The conveyor means includes an entangling member 24 which is supported on rollers 26, 28 and drive means (not shown) for rotation of the rollers. Preferred line speeds for the conveyor are in the range of 30 to 500 ft/min.

The entangling member 24, which preferably has a planar configuration, includes a symmetrical pattern of void areas which are fluid pervious and define an entangling pattern for the fibrous web 12. In the preferred embodiments, the void areas occupy at least 25 per cent of the area of the entangling member 24. As will be described in detail below, the entangling member may be provided with a variety of patterns which produce distinct novel fabrics. Representative entangling members are illustrated in Figs. 6A, 7, and 8.

Mounted above the entangling member 24 is an arrangement of generally parallel spaced manifolds 30 oriented in a cross-direction ("CD") relative to movement of the web. The manifolds 30 which are spaced approximately 4 inches apart are positioned at least 1 1/2 inches and preferably in the range of 3 - 8 inches above the entangling member. Each manifold 30 includes a plurality of closely aligned and spaced

divergent jet nozzles 32.

Preferred manifolds have specifications designed to deliver fluid pressures to the nozzles in the range 200 to 2500 psi. Advantage in the entangling process is obtained by ramping the manifold pressures in the MD so that increased fluid flows impinge the web as its lattice structure and coherence develop.

5 In the preferred embodiment the nozzles are spaced approximately 1 inch apart on the manifolds which in turn are positioned 3 to 6 inches above the entangling member 24.

As shown in Fig. 3, the nozzles 32 eject sprays 34 having a divergent fan shaped configuration downwardly onto the web 12 as it is advanced through the entangling apparatus. The close packed manifold arrangement and spacing of the nozzles 32 define a curtain of fluid which continuously impinges upon the  
10 web 12 and coacts with the entangling member 24.

The jet sprays 34 diverge in the CD relative to a central nozzle axis 36 which is perpendicular to the web. Experimentation has shown that a divergence angle of approximately 18 degrees yields optimum entanglement and randomization of the web.

To obtain effective entangling the curtain fluid must output energy to the web 12 of at least .1 hp-hr/lb  
15 and preferably in the range of .4 - 2.0 Hp-hr/lb.

Preferred nozzles 32 for use in the invention are of the type manufactured by Spraying Systems Co., distributed by J.W. Sowden & Associates, P.O. Box 5046, Manchester, New Hampshire 03108, under product designation 0503-TC. This nozzle has a tungsten carbide spray tip which has been found effective for providing regulated pressure sprays. Ejection orifices in the nozzle have a non-circular shaped  
20 configurations. The preferred nozzle has an effective diameter of .043 inches and flow of 1.5 gallons/min at an air included jet spray angle of 18° and 1000 psi.

Air entrained by the divergent jet sprays 34 is deflected by the web 12 generating turbulence which lifts the web relative to the entangling member and results in blistering of the web and fabric irregularities. To counterbalance the effect of the entrained air, a control means is provided which includes stabilizing  
25 mechanisms at entry and terminal end areas 38, 40 of the entangling station. For example, at the entry area 38, an air curtain means for directing air to the web 12 may be provided to coact with a baffle plate 42 which extends from a position outboard of the fluid curtain upwardly on an angle into the curtain. See Figs. 3 and 4. The air curtain means includes an air nozzle 44 which directs a continuous curtain of air beneath the baffle 42 to control entrained air in the entry area 38 of the entangling station 16.

30 To control entrained air at the terminal end area 40, a generally hollow perforated cylindrical roll 46 is spaced above the web 12. Counterclockwise rotation of the roll 46 by a friction drive means dissipates air entrained by the air curtain. Frictional movement of the roll 46 over the web 12 also presses fluid from the web through the entangling member 24.

Within the entangling station 16 the continuous curtain of aqueous fluid counterbalances the effect of  
35 entrained air when the manifolds 30 are arranged in close proximity, e.g., spacing of approximately 3 to 4.5 inches, as illustrated in Fig. 4. Where the manifolds 30 are spaced further apart, it is advantageous to position baffle members 48 between the manifolds 30 which are spaced from the web. See Fig. 9. Baffle members 48 have a generally V-shaped configuration to shield the web 12 from the effects of entrained air. Further advantage can be obtained by perforating the baffle members 48 to enable entrained air to escape.  
40 In the arrangement of Fig. 9, the manifolds 30 are spaced approximately 7 inches apart and the baffles 48 extend in the CD of the web.

A collecting tank 50 is located below the entangling member 24 for receiving fluids employed in the entangling process. The collecting tank 50 directs fluids to a filter 52 which removes fiber debris, and a pump 54 for recirculation of fluid to the manifolds 30. Pressure regulators 56 are located on a manifold  
45 connecting line 58 to provide controlled nozzle 32 pressures and transfer of energy to the web 12.

An alternative conveyor means structure is illustrated in Fig. 5 which includes a cylindrical entangling member 60. In other respects, this embodiment functions in the manner of the planar entangling member systems of Figs. 3 and 4. Manifolds 30 are stacked in close proximity spaced from the entangling member 60, and the control means of Fig. 3 is provided to dissipate and counteract air entrained at the web surface.

50 Fig. 5 also illustrates a preferred filtration system which may be employed in the invention. The filtration system is of the type manufactured by Dorr Oliver Inc., 77 Havemeyer Lane, Stamford, Connecticut 06900, and offered under product designation 120° DSM SCREEN. The DSM system includes a dispensing nozzle 64 and filter screen 66 which directs fiber debris 68 into discharge receptacle 70 and filtered fluid to a pump 72 for recirculation to the manifolds 30. Filter screen 66 employs an arrangement of slats.

55

#### Method of the Invention

As illustrated in the schematic diagram of Fig. 2, the non-randomized web 12 is advanced to an entanglement station and then to conventional treatment stations to produce hydroentangled fabric. In accordance with the entangling process of the invention, a curtain of divergent jets impinge upon the web 12 to randomize and intertwine fibers in the web into a coherent lattice pattern which approximates an isotropic configuration. It is a feature of the invention to provide an entangling member 24 having a pattern of voids which coact with divergent jet sprays 34 to produce novel fabric. Divergent jets 34 yield a preferred fabric when the void area of the entangling member occupy at least 25 per cent of the member.

Fig. 6A illustrates a preferred entangling member 24 which includes a plurality of symmetrical apertures 74 arranged so that the spacing between MD apertures is greater than CD apertures. For example, the apertures may have diameters of 1/16 inch and a center to center staggered aperture spacing of 3/32 inch. The MD and CD apertures respectively have center to center spacings of .16 and .092 inches. An entangling member 24 having this aperture configuration produces the fabric illustrated in Figs. 10A and B in accordance with process parameters described in Example 1.

Comparison of Figs. 6A and B illustrates the manner in which entangling of web fibers is achieved with the apparatus and process of the invention. MD oriented web 12 shown in Fig. 6A is advanced through the entangling station to yield the symmetrical diamond shaped randomized and entangled structures of Fig. 6B.

Non-woven fabric produced by this process and entangling member 24 of Fig. 6A has a generally uniform tensile strength including, dense nodes 76 formed in the apertures 74 by migrating fibers, and spaced parallel rows of criss-crossing fibrous bands 78 which intersect the nodes 76. The nodes are also connected by CD oriented interstitial fibers 80 which further enhance CD tensile strength of the fabric. Figs. 10A and B are photographs at 10X magnification of a non-woven cotton fabric produced on the Fig. 6A screen. The magnified view of the fabric shows the coherent and uniform lattice structure in which essentially all loose fiber ends are entangled within the nodes 76.

In accordance with the process of the invention, the curtain of divergent jet sprays 34 are directed onto the web passing through void areas in the entangling member 14. Simultaneously, the conveyor means advances the web 12 so that it traverses the divergent jet curtain and fibers in the web. Combination of the divergent jet sprays 34 and continuously moving entangling member 24 subjects the web 12 to vector forces in machine and cross directions which randomize and entangle web fibers.

Alternative entangling members are illustrated in Figs. 7 and 8. The entangling member 24 of Fig. 7 is similar to the aperture arrangement of Figs. 6A and B except that the spacing between apertures is greater in the cross than machine directions. For example, as set forth in Example 3, MD and CD apertures, respectively, may have center to center spacing of .092 and .160 inches. Apertures in this entangling member 24 are dimensioned and staggered to the specifications of the Fig. 6A member. This aperture pattern yields a diamond shaped lattice pattern characterized by dense MD aligned fibrous bands 82 which connect dense nodes 84. This structure has particular advantage where superior MD tensile strength is required in that it limits fabric necking in associated with an MD load which pulls the patterned fabric from the entangling screen for further processing.

Fig. 8 illustrates an entangling member 24 in the form of a conventional wire woven screen 86 having a mesh spacing of 12 wires/inch in the machine and cross directions, a wire diameter of .030 inches, and an open area of 41 per cent. Use of such a screen in the process of this invention yields a structure having a woven appearance which corresponds to the configuration of the screen. See Examples 7 and 8. The divergent jet sprays 34 of the fluid curtain entangle web fibers so that they migrate to overlies the mesh pattern of the screen.

Examples 1 - 8 and corresponding Figs. 10 - 15 describe and illustrate representative cotton fabrics produced by the method of the invention employing entangling members 24 having planar and cylindrical configurations and the spaced manifold arrangement of Figs. 3 and 5.

For these applications five stainless steel manifolds 30 having diameters of 2.5 inches were spaced apart at center to center distances of 4 inches and 6 inches above the web. Each manifold 30 was equipped with 20 divergent jet nozzles 32 on 1 inch centers. Each nozzle had an equivalent diameter of .043 inches and a delivery rate of 1.5 gallons of water per minute at a pressure of 1000 psi. The spray pattern width at a one foot distance was approximately 4 inches. It should be noted that these conditions were simulated in certain of the Examples through use of a single manifold which traversed an entangling member at successive intervals. See Examples 2 - 6 and 8.

In accordance with the method of the invention, the Examples employ webs of predominantly MD fibers prepared using a conventional carding system equipped with peeler rolls. The web consisted of No. 2

comber bleached non-continuous staple cotton fibers.

Energy output of the entangling water curtain in the Examples is calculated in accordance with the following equation:

$$E = \frac{14.2 C D^2 P^{1.5} N}{SW}$$

where

- E = Hp-hr/lb fiber  
 C = Jet discharge coefficient (dimensionless)  
 D = Orifice diameter (inches)  
 P = Manifold pressure  
 N = Jet density (jets/inch)  
 S = Line speed (feet/minute)  
 W = Basis weight (grams/square yard)  
 where, the jet discharge coefficient (C) was taken as follows:

Pressure (psi)	Discharge Coefficient (C) (dimensionless)
200	0.64
300	0.74
400	0.81
500	0.85
>500	0.85

A representative computation is set forth in Table I for a cotton fabric produced in the Example 2 application of the hydroentangling application of the invention (see description below). This Example yielded an entangled 24.5 gram/square yard (gsy) cotton fabric characterized by an MD/CD ratio of 2.0:1, MD/CD grab tensile strengths of 7.3/3.5 lbs/inch.

Table I

Manifold	Pressure (psi)	Flow/Man (gall/in)	Energy/Man (hp-hr/lb fiber)	Total Energy
1	300	0.707	0.069	0.069
2	500	0.999	0.162	0.230
3	700	1.241	0.281	0.512
4	900	1.407	0.410	0.922
5	1100	1.550	0.554	1.475

Total Energy is computed by calculating energy output for each manifold and adding the resulting energies.

Characteristics of fabrics illustrated in Figs. 10 - 15 are set forth in the Examples:

#### Example 1

A diamond structured cotton fabric of type illustrated in Figs. 10A and B was produced employing a cylindrical entangling member having the apertured configuration of Fig. 6A. The entangling member included 1/16 inch diameter apertures on 3/32 inch centers with apertures staggered to form an equilateral triangle. MD and CD apertures, respectively, were provided with center to center spacing of .16 and .092 inches.

A hydroentangling apparatus illustrated in Figs. 1 and 5 was employed at a process speed of 40 feet/minute. Web from the carding apparatus and peeler rollers was advanced to the entangling station 16

and onto the entangling member 24 where it was wetted down and then hydroentangled. Manifold pressures were ramped with the first manifold set at 150 psi and successive manifolds having pressures of 300, 500, 700 and 900 psi.

The entangled web was advanced to padder 18, and dry cans having a steam pressure of 80 psi to provide a coherent fabric structure having an MD/CD ratio of 2.5:1, weight of 38 gsy, and grab tensile strength in machine and cross directions of 5.6 and 2.2 lbs/in.

#### Example 2

Fabric similar to the that illustrated in Figs. 10A and B and described in Example 1 was produced on a planar entangling member 24 employing the apparatus of Figs. 1 and 3. Specifications for the entangling member 24 were identical to the apertured screen of Example 1.

The packed manifold arrangement of Fig. 3 was simulated on a prototype system by successively traversing the web beneath a single manifold at pressures of 300, 500, 700, 900 and 1100 psi at a process speed of 60 feet per minute.

The resulting fabric structure was characterized by an MD/CD ratio of 2.0:1, weight of 24.5 gsy, and grab tensile strength in machine and cross directions of 7.3 and 3.5 lbs/in.

#### Example 3

Fabric having the characteristics illustrated in Figs. 11A and B was produced employing the prototype system and process conditions of Example 2. Apparatus in this Example differed in that the planar apertured entangling member was shifted 90 degrees to orient apertures so that the spacing between MD apertures was greater than CD apertures. MD and CD apertures, respectively, had center to center spacings of .092 and .16 inches. See Fig. 7.

This Example produced a diamond structured non-woven fabric with predominant MD yarns which are capable of bearing higher MD loads without necking than fabrics of Examples 1 and 2.

The resulting fabric structure was characterized by an MD/CD ratio of 1.7:1, weight of 25.5 gsy, and grab tensile strength in machine and cross directions of 7.0 and 4.1 lbs/in.

#### Example 4

The ribbed fabric illustrated in Fig. 12 was produced on a planar reverse dutch woven entangling member employing the prototype apparatus and processing conditions described in Example 2 - process line speed of 60 feet/minute and manifold pressures ramped between 300 and 1100 psi. The reverse dutch entangling member includes a fine mesh including 12 wires/inch in a cross-direction (.022" diameter) and 68 wires/inch in the machine direction (.015" diameter).

The ribbed fabric produced in this Example is characterized by CD ribs and connecting interstitial fibers which provide a superior wipe material.

#### Example 5

An alternative ribbed non-woven, illustrated in Fig. 13, was produced in the manner described in Example 4 employing a coarse mesh reverse dutch entangling member. This screen includes .085 inch diameter wires arranged in the cross-direction with a spacing of 4 wires/inch, and 0.15 inch diameter wires positioned between the .085 inch wires. The screen also includes machine direction wires having a .015 inch diameter and spacing of 60 wires/inch.

#### Example 6

A hexagon patterned non-woven fabric, illustrated in Fig. 14, was produced in accordance with the process conditions of Example 2 - process line speed of 60 feet/minute and manifold pressures ramped between 300 to 1100 psi. The entangling member included the planar reverse dutch woven screen



described in Example 4 overlaid with a perforated metal screen having a hexagon pattern. The hexagons of the metal screen were defined by 1/4 inch flats separated by 1/16 inch wide surrounding metal areas.

#### 5 Example 7

A predominantly machine direction oriented fabric, similar the fabric illustrated in Fig. 15, was produced on a cylindrical 12 x 12 woven wire entangling member under the process conditions of Example 1 - process speed of 40 feet/minute and ramped manifold pressures ranging from 150 to 900 psi. The woven  
10 screen, which was of the type illustrated in Fig. 8, had a wire diameter of 0.030 inches and open void areas which formed 41 per cent of the screen.

The hydroentangled fabric of this example had the following properties: MD/CD ratio of 3.9:1, weight of 33 gsy, and grab tensile strength in machine and cross directions of 3.4 and 0.9 lbs/in.

15

#### Example 8

The fabric of this is similar to Example 7 and fabric illustrated in Fig. 15. The woven screen of Example 7 was provided with a planar configuration and employed under the process conditions of Example 2 - line  
20 speed of 60 feet/minute and manifold pressures ramped between 300 and 1100 psi.

The hydroentangled fabric of this example had the following properties: MD/CD ratio of 1.5:1, weight of 22.5 gsy, and grab tensile strength in machine and cross directions of 3.9 and 2.6 lbs/in.

Table II summarizes the test results discussed in the Examples:

25

Table II

Summary of Test Results					
Example	Screen Type	Weight (gsy)	Grab Tensile (lbs/in)		MD/CD Ratio
			MD	CD	
1	Perforated 1/16 dia on 3/32 crs	38	5.6	2.2	2.5:1
2	Perforated 1/16 dia on 3/32 crs	24.5	7.3	3.5	2.0:1
3	Perforated 1/16 dia on 3/32 crs	25.5	7.0	4.1	1.7:1
7	Woven 12x12 - 90	33	3.4	0.9	3.9:1
8	Woven 12x12 - 90	22.5	3.9	2.6	1.5:1

From the foregoing, it will be appreciated that the invention achieves the objects stated heretofore. An  
40 entangling apparatus 10 of uncomplex design is provided which entangles a non-randomized web 12 of fibrous material employing divergent jet sprays 34 and a coacting entangling member 24. Advantage is obtained in the invention by use of jet sprays 34 which have wide orifice openings as compared to conventional columnar jet nozzles. Such nozzles do not clog with fiber debris as is the case with prior art columnar nozzles which have small diameters. As a consequence, filtration systems employed in the  
45 invention require less exacting specifications than in prior art entangling systems.

Further advantage is obtained in the invention through use of a system which does not require web randomization apparatus. Random airway and scrambling systems of the prior art are dispensed with. The entangling apparatus 10 randomizes and scrambles the web without requirement of these processing steps.

It will be recognized by those skilled in the apparatus and process of the invention have wide  
50 application in the production of a diversity of patterned non-woven fabrics with characteristics determined by the design and specifications of entangling members 24. For example, the cotton fabrics illustrated in the Examples have particular application as low cost gauze fabric substitutes.

Numerous modifications are possible in light of the above disclosure. For example, the preferred  
55 process of the invention employs water as the entangling medium. Other fluids including binders may be introduced into the fabric in the entangling process. Similarly, although selected entangling members 24 are illustrated in the drawings, it will be recognized that other configurations are within the scope of the invention.

Therefore, although the invention has been described with reference to certain preferred embodiments,

it will be appreciated that other entangling apparatus, processes and non-woven fabrics may be devised, which are nevertheless within the scope and spirit of the invention as defined in the claims appended hereto.

5

## Claims

1. An apparatus for entangling a non-woven fibrous web by impacting the web with pressurized fluid jets, the web including a plurality of fibres, characterized by the fact that it comprises:
  - 10 conveyor means for conveying the non-woven fibrous web in a machine direction ("MD") through an entangling station, said conveying means supporting an entangling member which underlies the non-woven fibrous web, said entangling member including a symmetrical pattern of void areas which are fluid pervious; curtain means disposed above the conveyors means for directing a continuous curtain of the fluid
  - 15 downwardly through the non-woven web and said entanglement member in said entangling station, said curtain including a plurality of nozzles which eject divergent jets; and control means for controlling dispersion of air entrained by said curtain; so that said curtain coacts with said entangling member to randomize, entangle and intertwine the web fibers.
2. An apparatus as set forth in Claim 1, wherein said void area occupy at least 25 per cent of the area of said entangling member.
3. An apparatus as set forth in Claim 1 or 2 characterized by the fact that said divergent jets have a spray pressure of at least 200 psi.
4. An apparatus as set forth in Claim 1, 2 or 3 characterized by the fact that said curtain has outputs energy of at least .1 hp-hr/lb to the web.
- 25 5. An apparatus as set forth in Claim 1, characterized by the fact that said divergent jets have an angle of divergence of at least 2 degrees.
6. An apparatus as set forth in Claim 1, characterized by the fact that the spray pressure of said divergent jets is ramped in the MD over a pressure range of 200 - 2500 psi.
- 30 7. An apparatus as set forth in Claim 6, characterized by the fact that said divergent jets diverge in a cross-direction ("CD") relative to the MD and have an angle of divergence of at least 2 degrees.
8. An apparatus as set forth in Claim 7, characterized by the fact that said curtain means is spaced at least 1 1/2 inches above said entangling member.
- 35 9. An apparatus as set forth in Claim 1, characterized by the fact that said entangling member is configured in the form of a generally cylindrical drum.
10. An apparatus as set forth in Claim 1, characterized by the fact that said entangling member has a generally planar exterior surface.
- 40 11. An apparatus as set forth in Claim 2, 6 or 10, characterized by the fact that said randomization provides MD and cross-section ("CD") oriented fibers in the web, and wherein said void areas include a plurality of apertures arranged so that the MD apertures are spaced further apart than CD apertures.
- 45 12. An apparatus as set forth in Claim 9, characterized by the fact that said randomization provides MD and cross-direction ("CD") oriented fibers in the web, and said void areas include a plurality of apertures arranged so that CD apertures are spaced further apart than MD apertures.
13. An apparatus as set forth in Claim 12, characterized by the fact that said apertures occupy at least 25 per cent of the area of said entangling member and said divergent jets have CD oriented angles of divergence of at least 2 degrees.
- 50 14. An apparatus as set forth in Claim 1, characterized by the fact that said entangling station includes entry and terminal end areas, and said control means include means for directing an air curtain onto the web in said entry area.
- 55 15. An apparatus as set forth in Claim 14, characterized by the fact that said control means includes a generally hollow perforated cylindrical roll spaced from and disposed above the web in said terminal end area for frictional contact with the web, and means for rotating said cylindrical roll to dissipate entrained air in said terminal end area.

16. An apparatus as set forth in Claim 14 or 15, characterized by the fact that said control means further includes a baffle plate positioned in said entry area spaced above the web, said air curtain means and baffle coacting to shield and counterbalance back pressure applied to the web by air entrained in said entry area by said fluid curtain.
17. An apparatus as set forth in Claim 1, characterized by the fact that said fluid curtain means includes a plurality of generally parallel spaced manifolds arranged in said entangling station, said manifolds being arranged in a cross-direction ("CD") which is generally perpendicular to said MD, each manifold including a plurality of said divergent jets.
18. An apparatus as set forth in Claim 17, characterized by the fact that said divergent jets include orifices each having a central vertical axis which is generally perpendicular to the web, said entangling member has a generally planar exterior surface which underlies the web, and said divergent jets have a spray pressure of at least 200 psi.
19. An apparatus as set forth in Claim 18, characterized by the fact that said divergent jets have an angle of divergence relative to said central axis of at least 2 degrees.
20. An apparatus as set forth in Claim 18, characterized by the fact that said curtain means further includes means for recirculating fluid passing through said entangling member to said manifolds.
21. An apparatus according to Claim 2, characterized by the fact that the fibers are staple fibers, said conveying means supporting a generally planar entangling member which underlies the non-woven fibrous web whereby said curtain coacts with said entangling member to randomize the web fibers, said fibers entangling together and migrating to apertures in said entangling member to form nodes which are connected by interstitial fibers.
22. An apparatus as set forth in Claim 21, wherein said nozzles each include a shaped orifice having an effective diameter of .043 inches and flow of 1.5 gallons/min at 1000 psi.
23. An apparatus as set forth in Claim 22, wherein said randomization provides MD and cross-direction ("CD") oriented fibers in the web, and said web, and said apertures are arranged so that the spacing ratio of MD apertures is greater than CD apertures.
24. An apparatus as set forth in Claim 23, wherein said fluid curtain means includes a plurality of generally parallel spaced manifolds arranged in said entangling station, said manifolds being disposed in said CD orientation relative to the web, each manifold including a plurality of said nozzles.
25. An apparatus as set forth in Claim 24, wherein said manifolds are spaced approximately 4 inches apart, said nozzles each have a central vertical axis which is generally perpendicular to the web, and said nozzles are spaced approximately 1 inch apart.
26. An apparatus as set forth in Claim 24, wherein the spray pressure of said divergent jets is ramped in the MD over a range of 200 - 2500 psi, and said manifolds are spaced 3-8 inches above said entangling member.
27. A method for entangling a web including a plurality of fibers to produce non-woven fabrics having a symmetrical entangled lattice structure employing divergent jets which form a curtain of fluid, characterized by the fact that it comprises the steps of:
- (a) supporting the web on an entangling member including a symmetrical pattern of void areas which are fluid pervious;
  - (b) directing the curtain of fluid downwardly through the web and said void areas, and traversing the web with the curtain until the fibers are randomized and entangled to produce a non-woven fabric having a structure determined by said entangling member; and
  - (c) dispersing air entrained by the curtain of fluid onto the web to maintain the web in contact with said entangling member.
28. The method of Claim 27, characterized by the fact that said traversing step is of sufficient duration to cause the fibers to migrate to said apertures to form nodes which are connected by interstitial fibers.
29. The method of Claim 27, comprising the further steps of filtering fluid which impinges upon the web to remove fiber debris, and recirculating the filtered fluid to said divergent jets.
30. A non-woven fabric made by the method of Claim 27, characterized by the fact that it comprises a symmetrical array of entangled fibers, said symmetrical array including a lattice structure of dense nodes which are connected by interstitial fibers which have an MD/CD ratio in the range of 1:1 - 4:1.
31. A non-woven fabric according to Claim 30, characterized by the fact that it is fabricated of cotton fibers having an MD/CD ratio in the range of 1:1 - 4:1.

32. A non-woven fabric characterized by the fact that it comprises:  
a symmetrical array of fluid entangled fibers including a lattice structure of spaced parallel machine  
direction ("MD") oriented rows of criss-crossing fibrous bands, and spaced cross-direction ("CD") oriented  
fibrous bands, said CD and MD fibrous bands intersecting at dense fiber nodes,

5 said CD and MD fibrous bands defining void areas which occupy at least 25 per cent of the fabric area,  
said symmetrical array of fibers having a uniform cohesive grab tensile MD and CD strengths of at least 2  
lbs/inch and 1 lb/inch, respectively, and an MD/CD ratio in the range of 1:1 - 4:1.

33. A non-woven fabric according to Claim 32, characterized by the fact that the fabric is made of  
staple No. 2 comber cotton fibers, and has a weight of approximately 24.5 to 39 gsy.

10

15

20

25

30

35

40

45

50


55

Neu eingereicht / N  
 Nouvellement  
 (R 35)

EP 0 337 451 A2


11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

FIG. 1

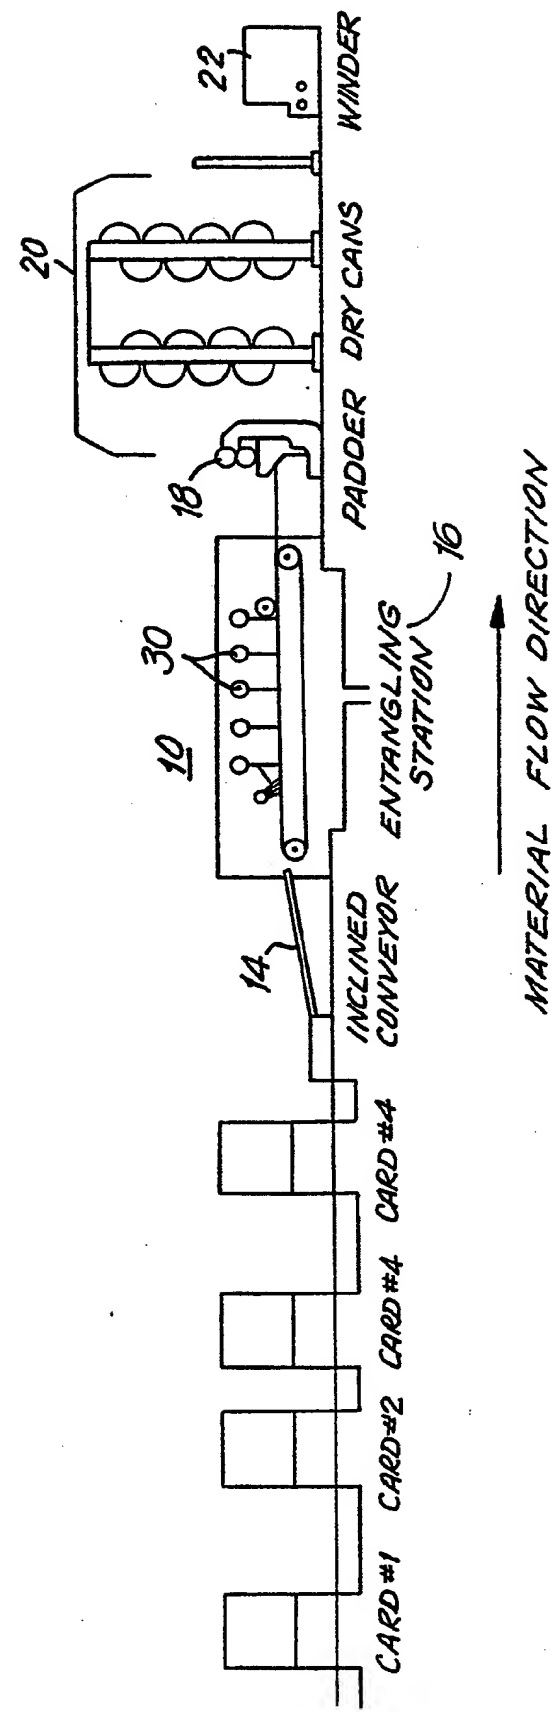

Neu eingereicht /  
Nouvellement  
IP 25


FIG. 2

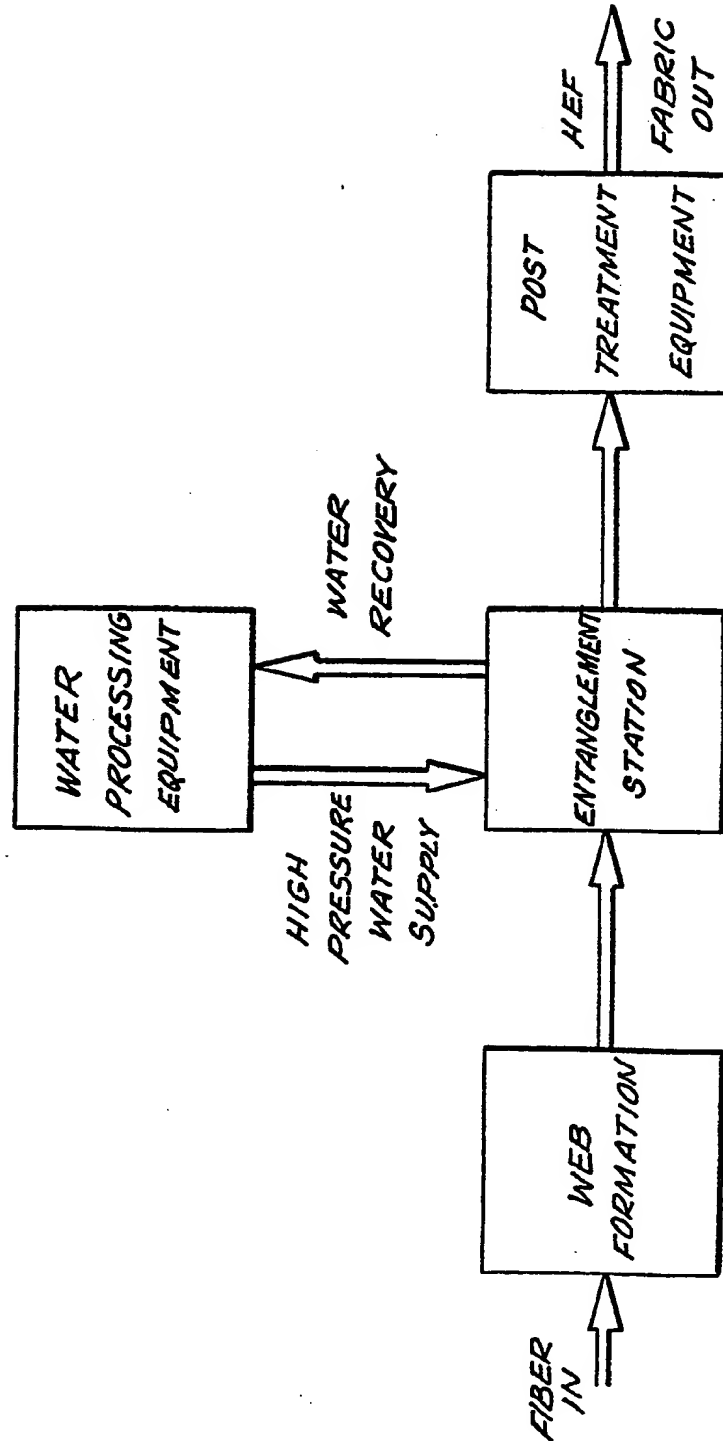



Neu eingereiht  
Nouvelles  
(F)

**EP 0 337 451 A2**

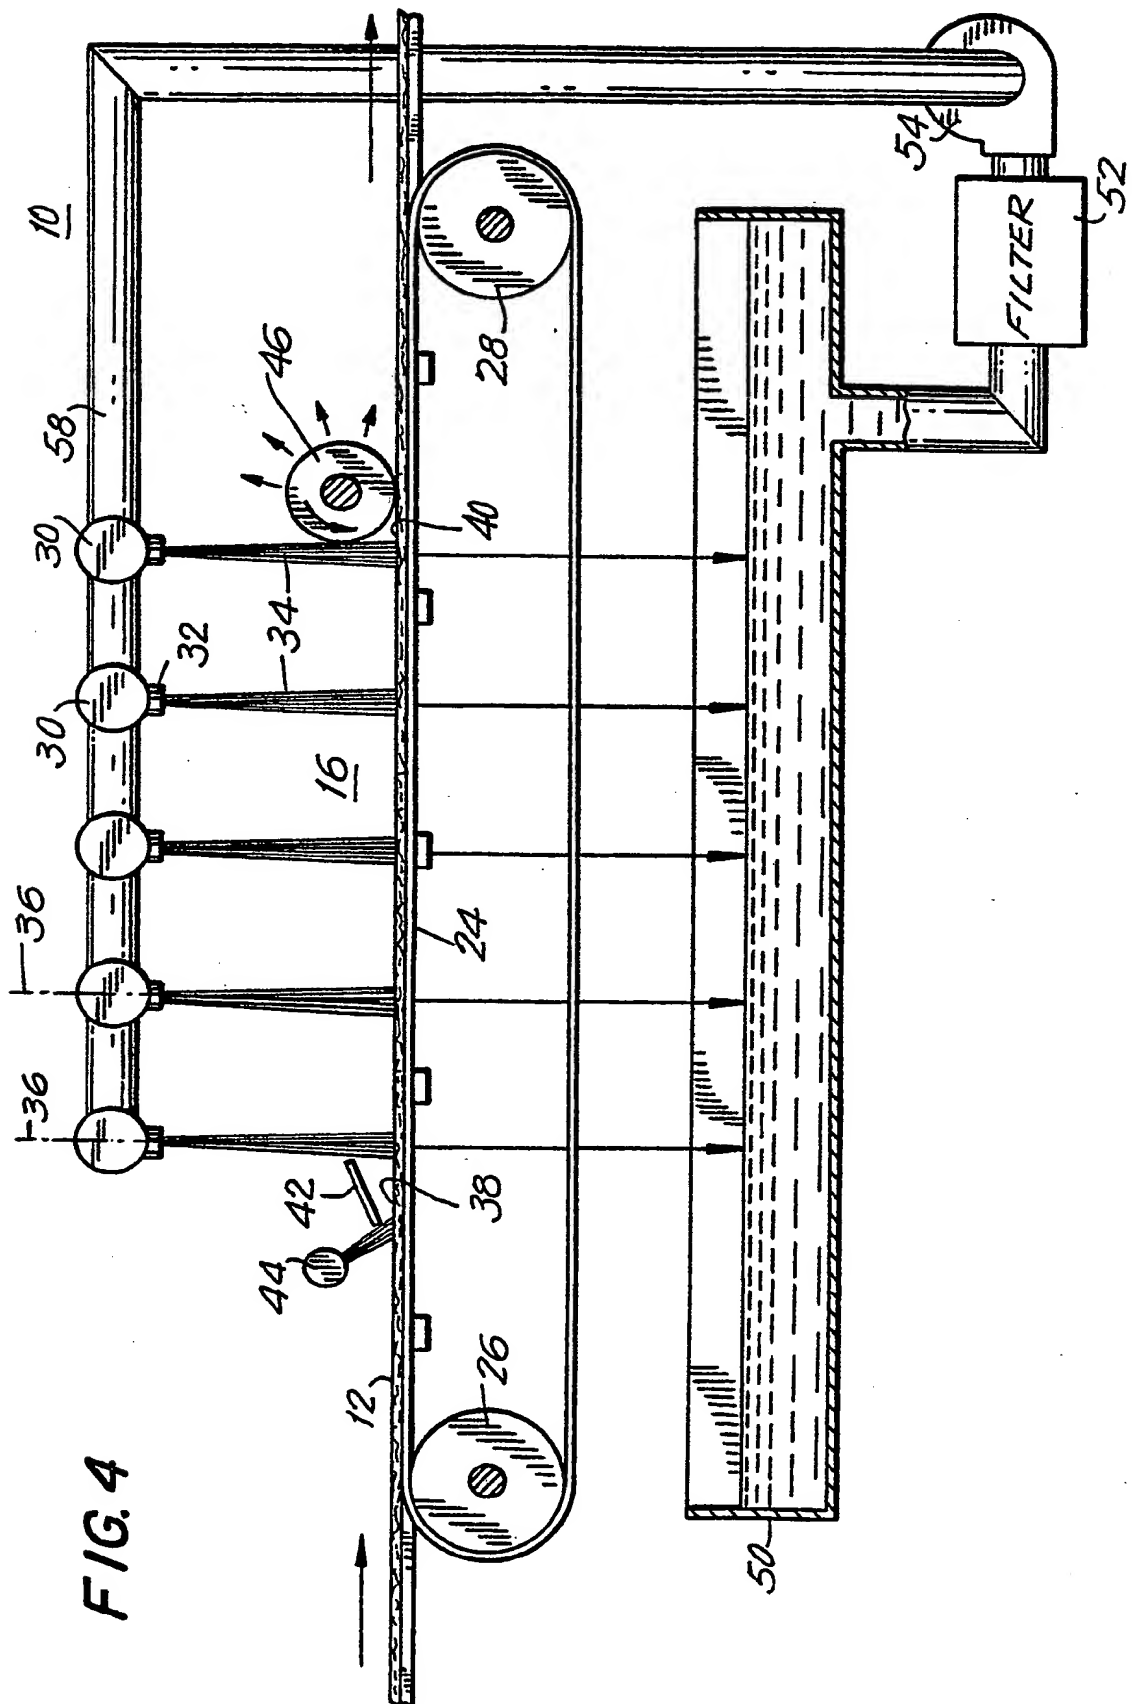

**FIG. 4**



Neu eingereicht / N°  
Nouvellement c.  
(R 55)


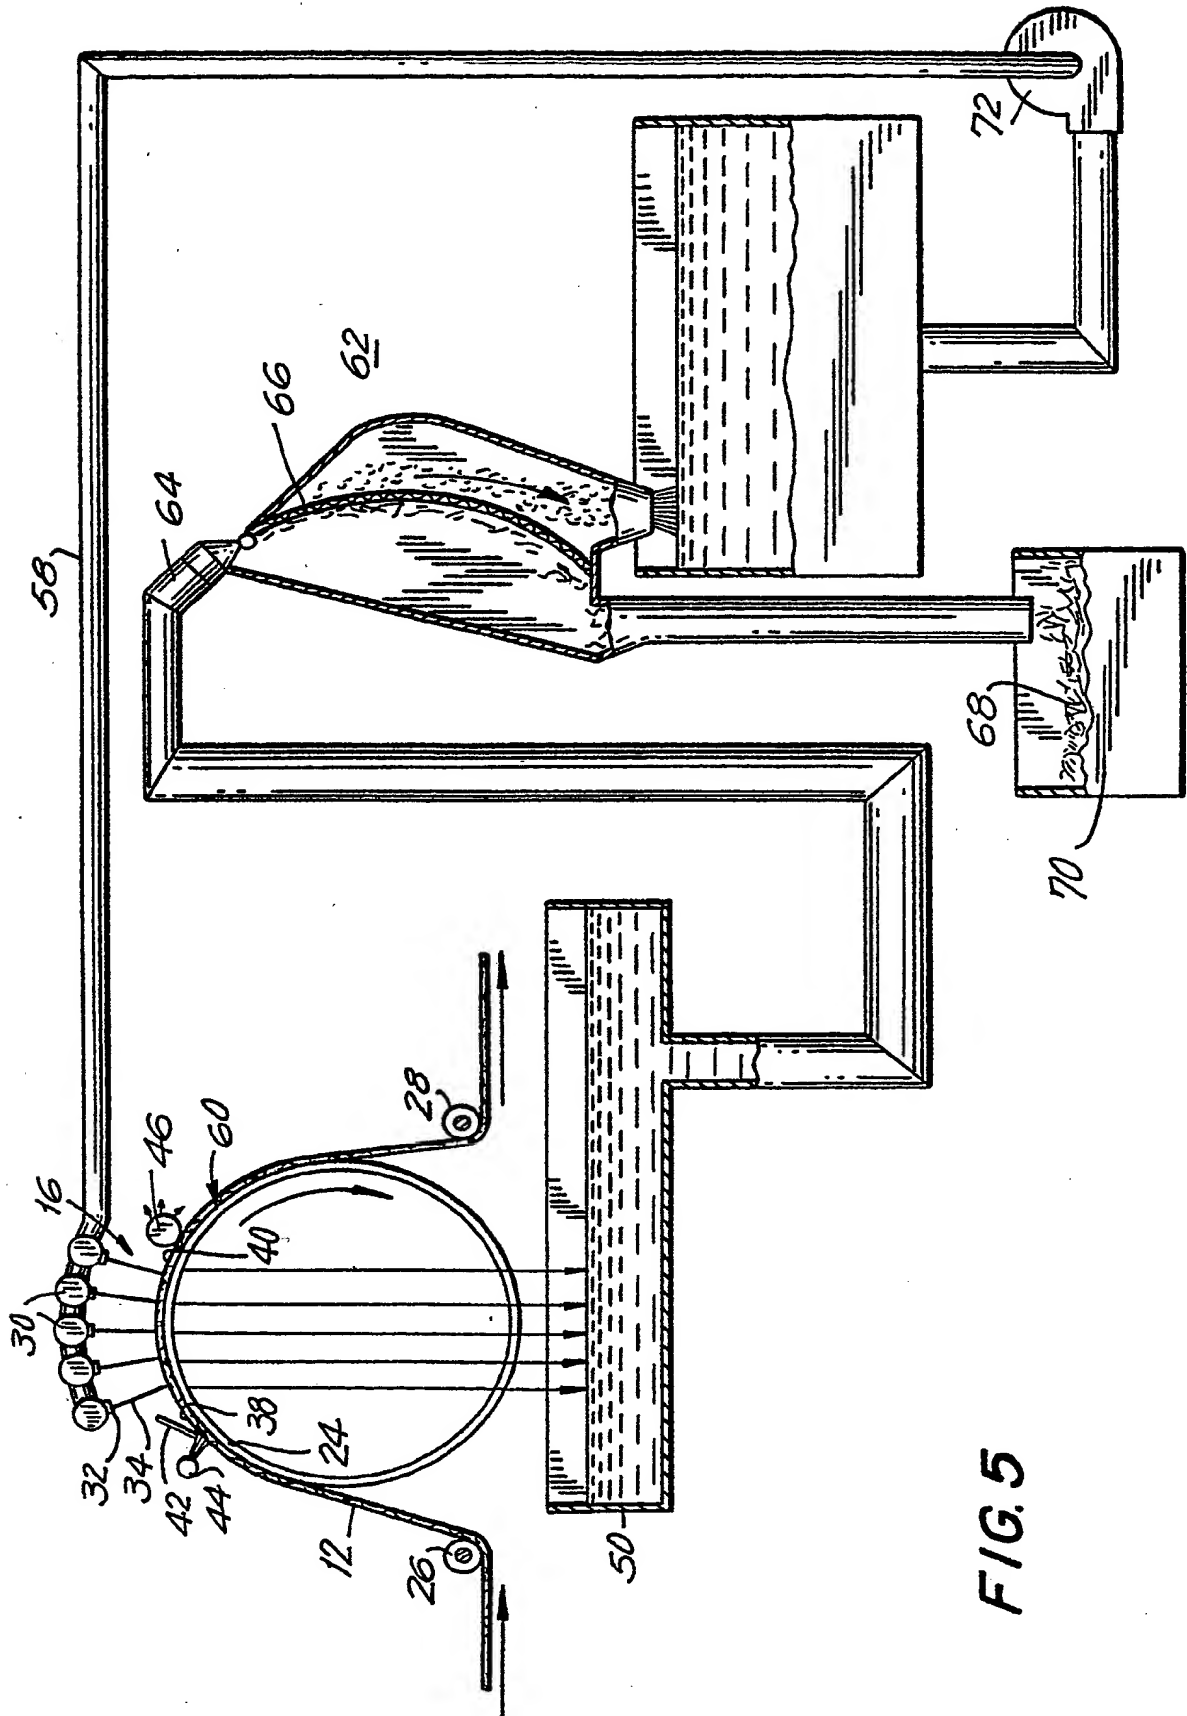


FIG. 5

**FIG. 6A**

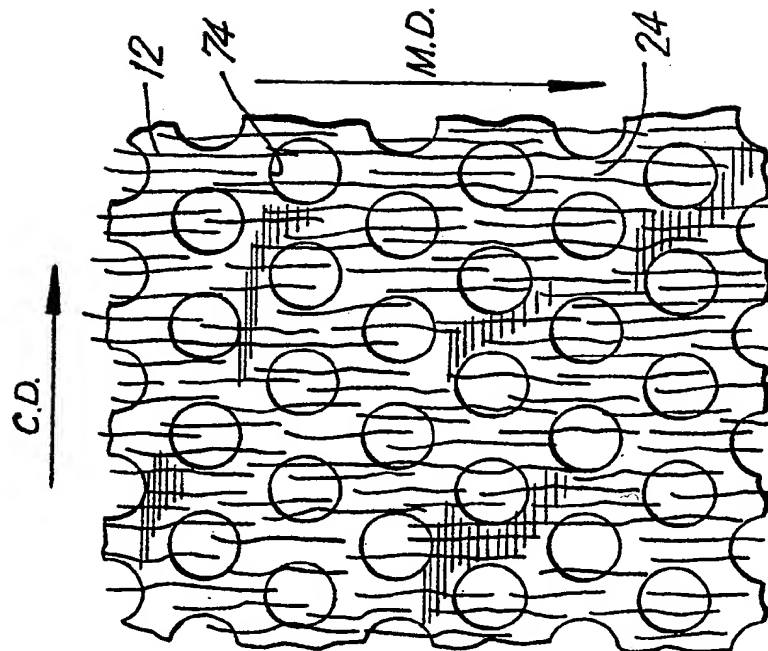

**FIG. 8**



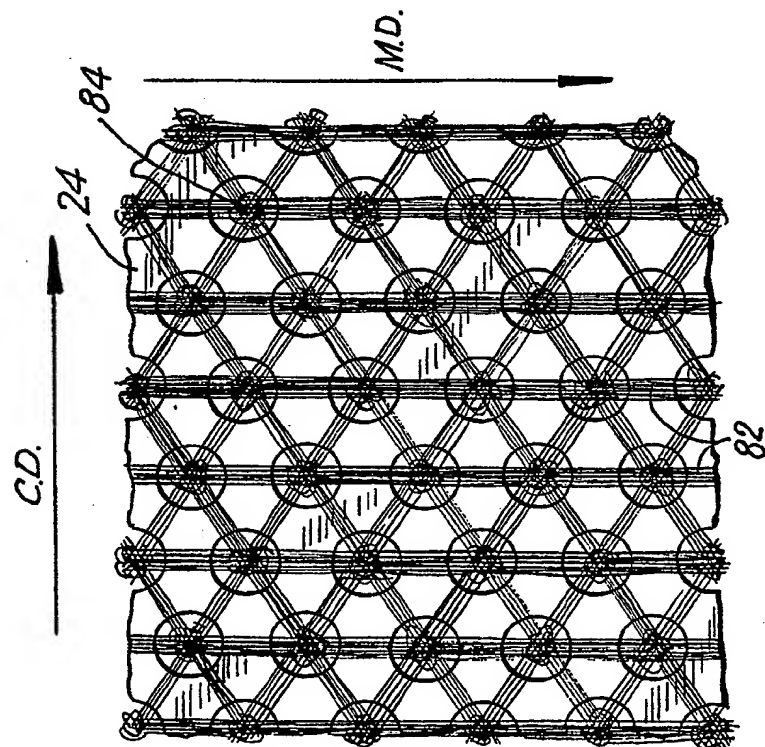


FIG. 9

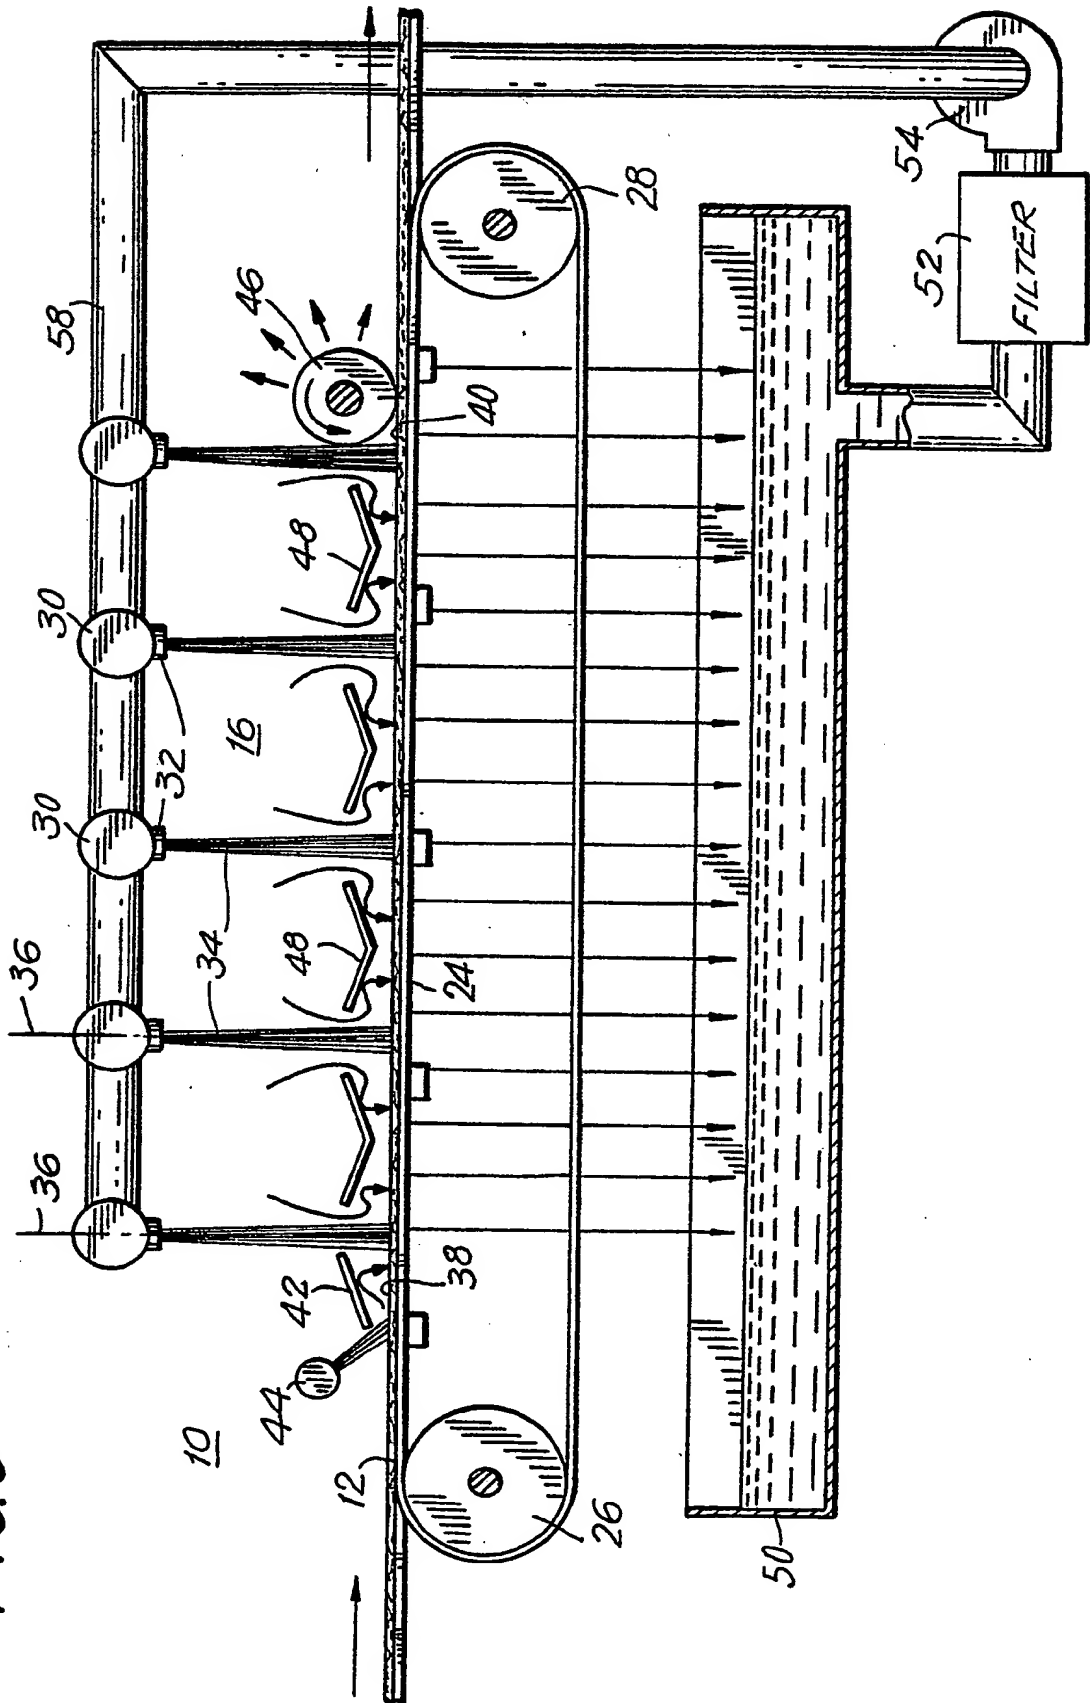

*FIG. 10A*


*M.D.*

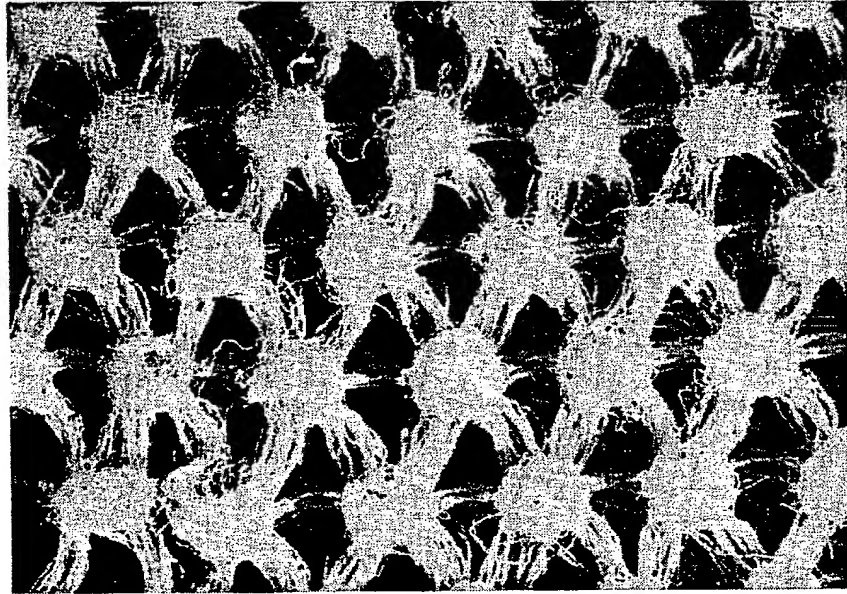

*10 X SIZE*

*FIG. 10B*

*M.D.*

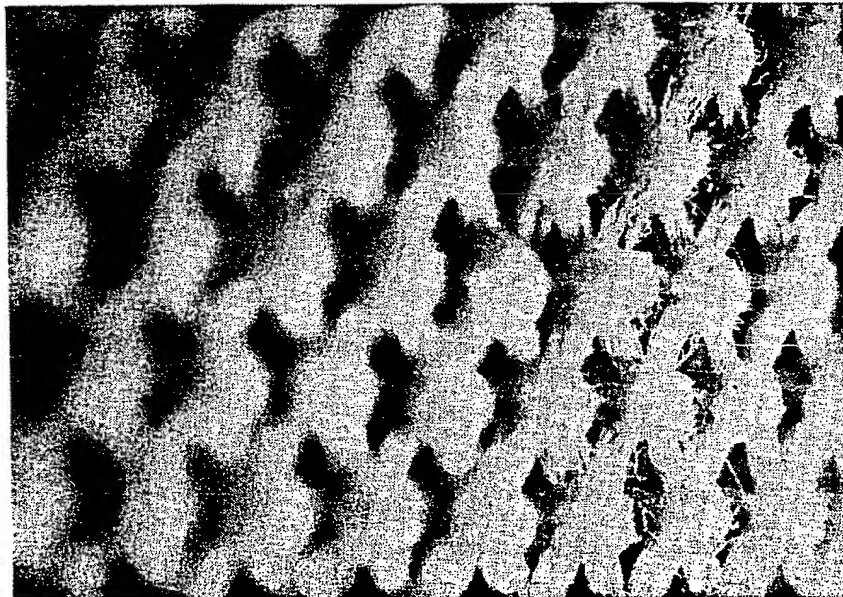


*10 X SIZE*

33 33 33 33 33 33  
1 3 3 3 3 3 3 3 3 3  
3 3 3 3 3 3 3 3 3 3  
3 3 3 3 3 3 3 3 3 3

FIG. 11A

*FIG. IIA*

M.D. ↑

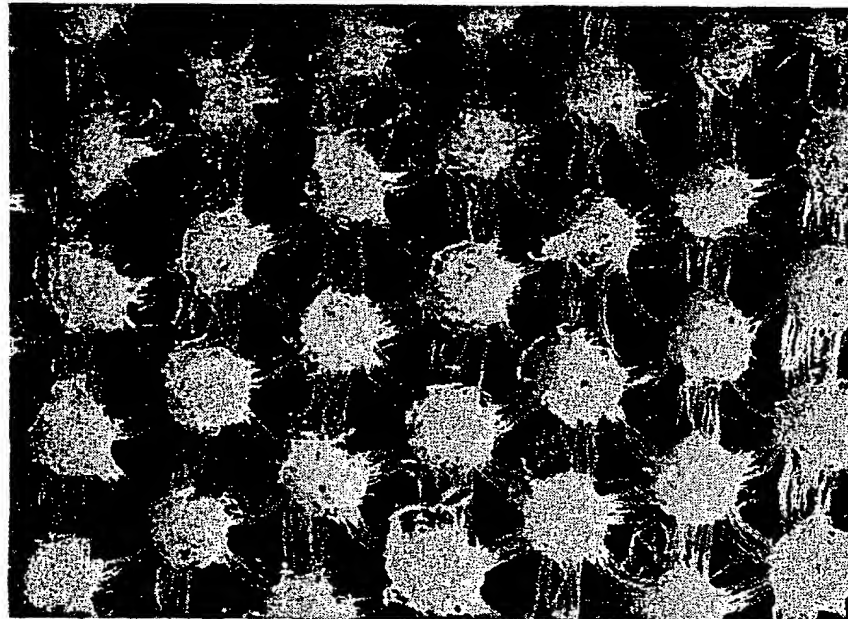

*10X SIZE*

*FIG. IIB*

M.D. ↑



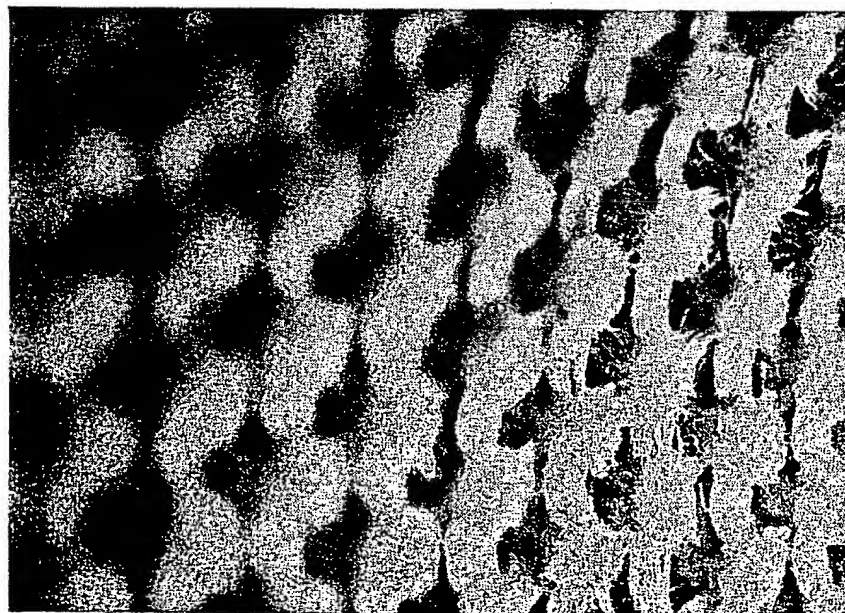


FIG. 12

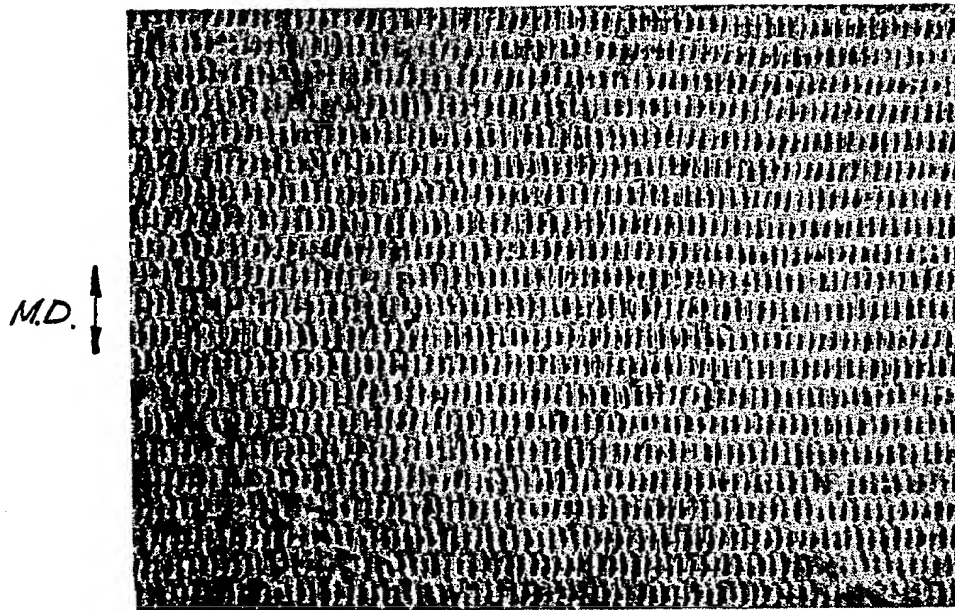

1.8 x SIZE


FIG. 13

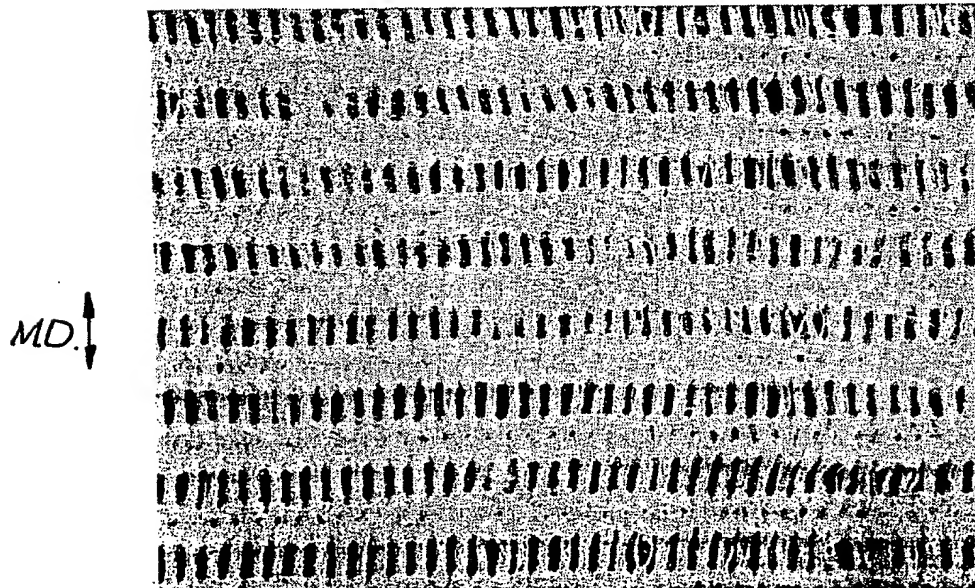

1.8 SIZE




*FIG. 14*

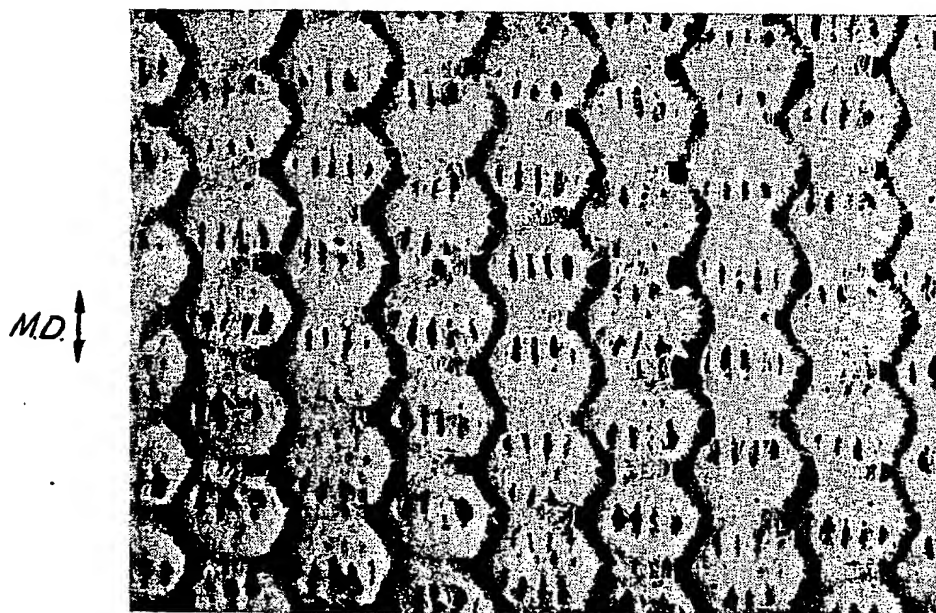

*1.8 X SIZE*

*FIG. 15*

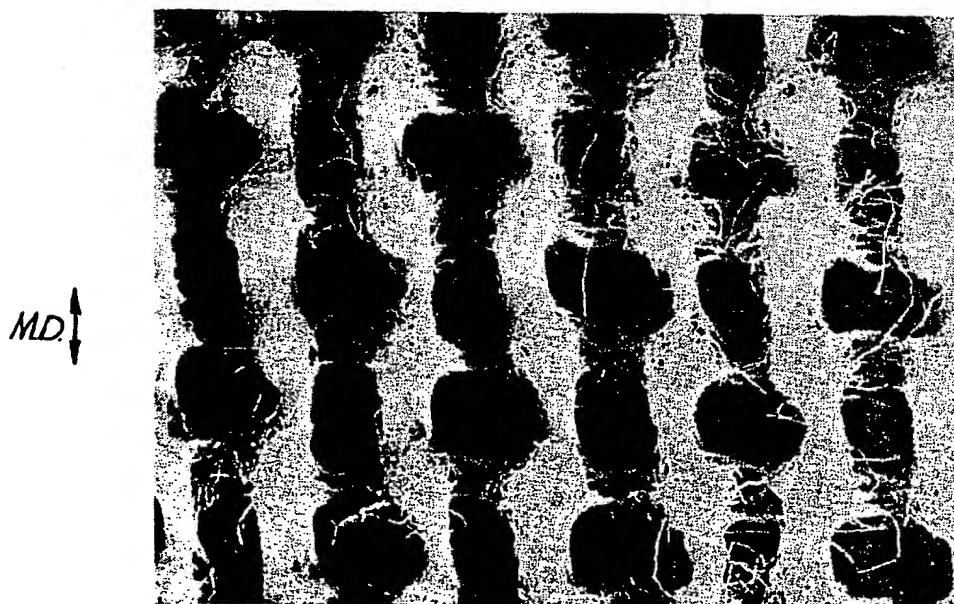

*10 X SIZE*



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 337 451**  
**A3**

(12)

# EUROPEAN PATENT APPLICATION

(21) Application number: **89106586.4**(51) Int. Cl.<sup>5</sup>: **D04H 1/44**(22) Date of filing: **13.04.89**(30) Priority: **14.04.88 US 181284**(43) Date of publication of application:  
**18.10.89 Bulletin 89/42**(84) Designated Contracting States:  
**BE DE FR GB NL**(88) Date of deferred publication of the search report:  
**12.09.90 Bulletin 90/37**(71) Applicant: **VERATEC, INC.**  
**100 Elm Street**  
**Walpole, MA 02081-1898(US)**

(72) Inventor: **Greenway, John Michael**  
**44 Spruce Drive**  
**Westwood, MA 02090(US)**  
Inventor: **Schortmann, Walter Edward**  
**2630 Diamond Hill Road**  
**Cumberland, RI 02864(US)**  
Inventor: **Mancini, Peter**  
**161 Common Street**  
**Walpole, MA 02081(US)**  
Inventor: **Metrick, Dennis**  
**26 Forestdale Drive**  
**Cumberland RI 02864(US)**  
Inventor: **Connolly, Timothy**  
**20 East Monroe Street**  
**Norwood, MA 02062(US)**

(74) Representative: **Reichel, Wolfgang, Dipl.-Ing.**  
**et al**  
**Reichel und Reichel Parkstrasse 13**  
**D-6000 Frankfurt am Main 1(DE)**

(54) **Apparatus for producing symmetrical fluid entangled non-woven fabrics and related method.**

(57) An apparatus and related process for entangling a staple fibrous web which employs divergent fluid jets. The web is advanced through an entangling station on a conveying means which supports an entangling member having a symmetrical pattern of fluid pervious void areas. The divergent jet sprays which are disposed above the entangling member direct a continuous curtain of fluid onto the web, coacting with the entangling member to entangle web fibers into a coherent lattice structure. The divergent jet sprays are provided by nozzles having wide orifice diameters which accommodate less complex fluid recirculation and filtration systems than employed in the prior art columnar jet processes.

**EP 0 337 451 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 89 10 6586

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	US-A-4085485 (R.E. BRANDON ET AL) * column 2, line 42 - column 4, line 3; claims 2, 3, 9-24; figure 12 * * column 6, line 32 - column 9, line 4 * ---	1-3, 5-8, 10, 11, 13	D04H1/44
A	FR-A-1460513 (E.I. DU PONT DE NEMOURS) * abstract; figures 1, 3, 5, 7a-7c *  * page 1, right-hand column - page 6, left-hand column *  *examples 9,18-22* ---	1, 3, 5-8, 10, 13, 17-19 21-24, 27, 31-33	
A	GB-A-1515455 (KURARAY CO.) * page 1, line 5 - page 5, line 63; claims 1-6; figures 2, 8 *  ---	1-3, 5-13, 19-23, 27, 30, 32	
D,A	US-A-2862251 (F. KALWAITES) * column 2, line 33 - column 5, line 23; claims 1-5, 13-18; figures 22-34 *  * column 9, line 20 - column 11, line 46; claims 34-37, 43-47; figures 1-6, 11, 49-59 * * column 14, line 28 - column 15, line 41 * * column 19, line 74 - column 28, line 44 * * column 31, line 8 - column 33, line 68 * ---	1-3, 5, 7-14, 18-23, 27, 28 30-33	TECHNICAL FIELDS SEARCHED (Int. Cl.4)
A	EP-A-147904 (UNI-CHARM CO.) * page 3, line 27 - page 12, line 13; claims 1, 4, 7, 8; figures 1, 2 *  -----	1, 3, 6, 10, 17, 18, 20-22 24-27, 29	D04H
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 JULY 1990	Examiner BLASBAND I.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons ----- & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 01.82 (P0401)